

Table of Contents

1. GETTING STARTED	2
1.1 SAFETY PRECAUTIONS	2
1.2 PACKAGE CONTENT	3
2. PRODUCT VIEWS	4
2.1 FRONT VIEW.....	4
2.2 SIDE VIEWS.....	5
2.3 REAR VIEW	5
3. WIRELESS KEYBOARD AND MOUSE INSTALLATION	7
3.1 HARDWARE INSTALLATION.....	7
3.2 PAIRING DEVICE	8
3.3 HOT KEY FEATURE	9
4. APPENDIX.....	10
4.1 PRODUCT SPECIFICATIONS	10
4.2 TECHNICAL SUPPORT AND WARRANTY INFORMATION.....	11
4.3 DISCLAIMER	11
4.4 TRADEMARK ACKNOWLEDGEMENT	11

1. Getting Started

Thank you for purchasing **Prestigio Officer P0795**. You have made an excellent choice and we hope you will enjoy all of its capabilities. The product offers a fully functional personal computing experience with state of art appearance. Please read through the user manual carefully before using the product, and follow all of the procedures in the manual to fully enjoy all features of the product.

1.1 Safety Precautions

Please observe all safety precautions before using **Prestigio Officer P0795**. Please follow all procedures outlined in this manual to correctly operate the device. Failure to comply with the following potentially hazardous situations may result in injury or property damage.

- Do **NOT** attempt to disassemble or alter any part of the machine that is not described in this guide.
- Do **NOT** block any ventilation openings.
- Do **NOT** place the machine in contact with water or any other liquids. The machine is **NOT** designed to be liquid proof of any sort.
- In the event of liquid entry into interior of device, immediately disconnect the machine from power source. Continual use of the machine may result in fire or electrical shock. Please consult your product distributor or the closest support center.
- To avoid risk of electrical shock, do not connect or operate the machine with wet hands.
- Do **NOT** place the machine near a heat source or directly expose it to flame or heat.
- Do **NOT** place the machine in vicinity of equipments generating strong electromagnetic fields. Exposure to strong magnetic fields may cause malfunctions or data corruption and loss.


1.2 Package Content

Item	Description	Quantity
	Prestigio Officer PO795	1
	AC Power Adapter	1
	User Manual	1
	Driver and Documentation CD	1
	Warranty Card	1
	Wireless Keyboard	1
	Wireless Mouse	1
	RF Receiver	1

2. Product Views

The images in this document are for user reference only. The actual product may look slightly different from these images.

2.1 Front View

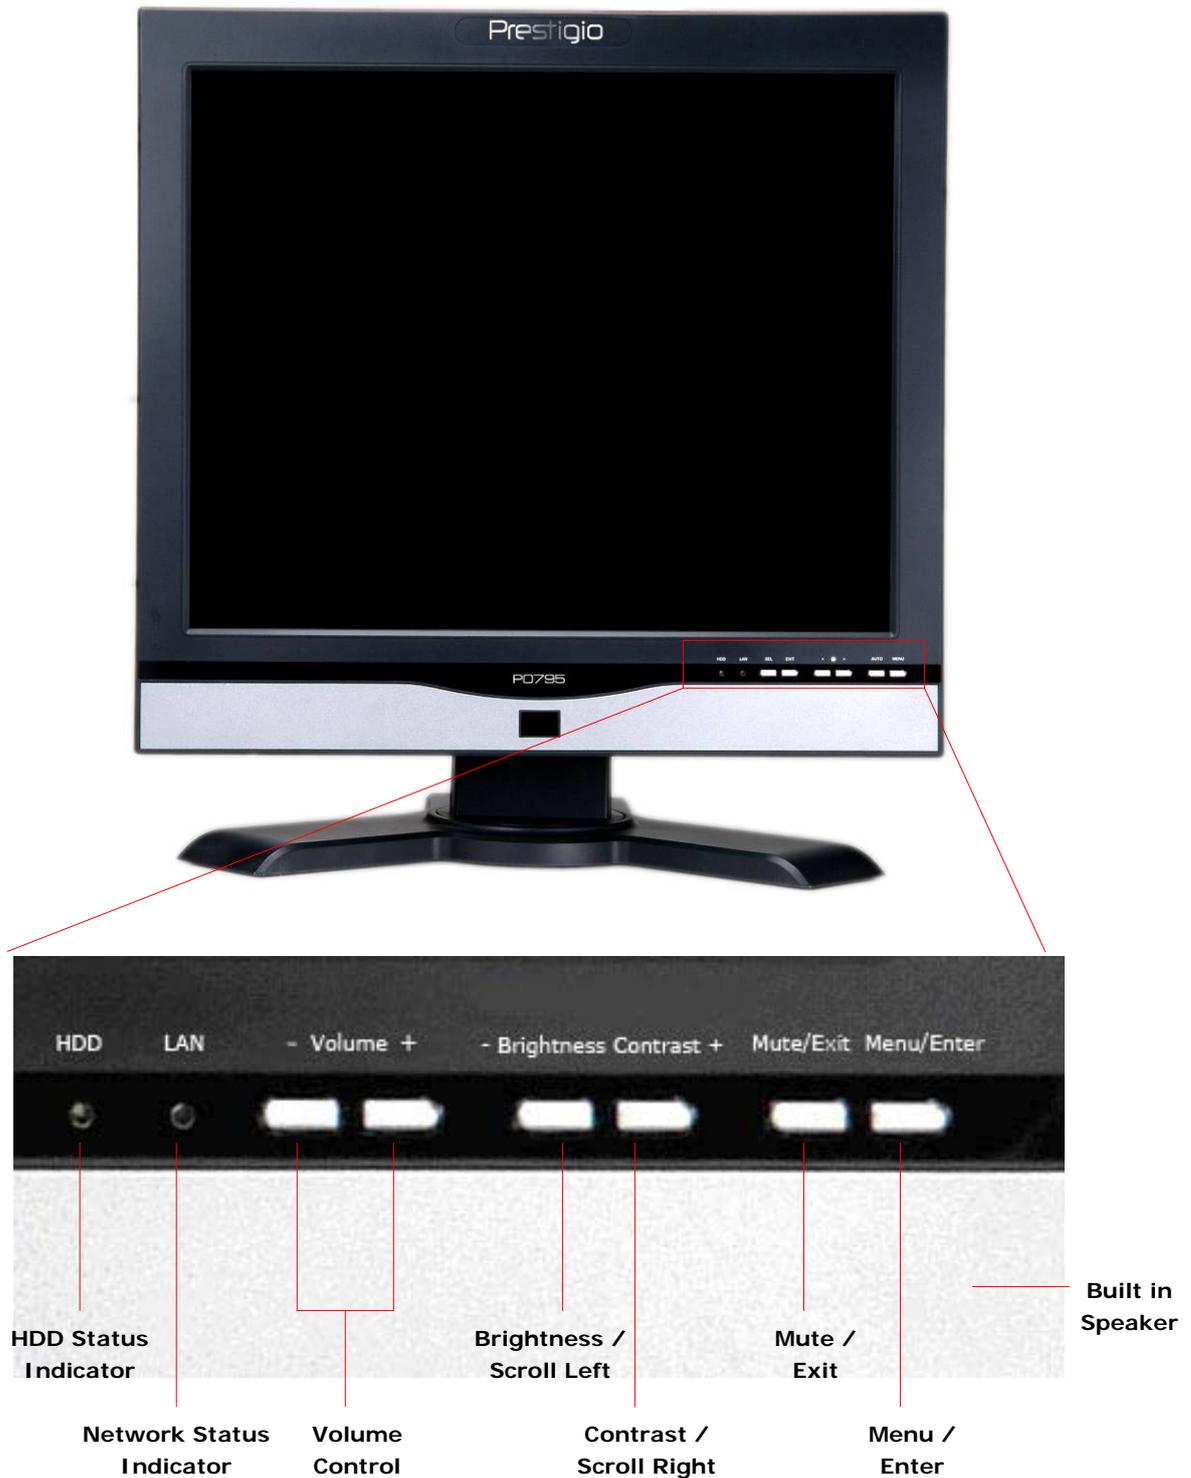


2.2 Side Views



2.3 Rear View



2.4 Back Panel View

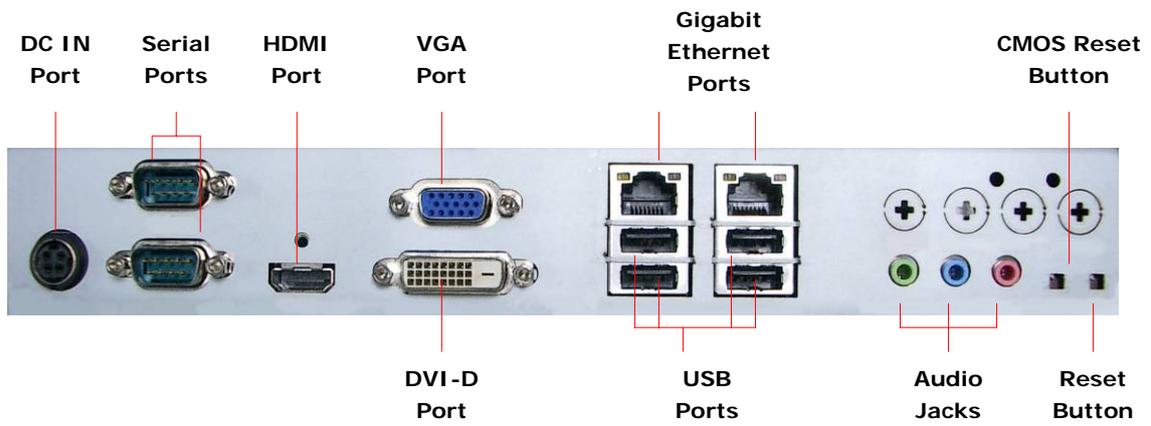

3. Wireless Keyboard and Mouse Installation

Prestigio Officer PO795 is equipped with a set of wireless keyboard and mouse to further enhance its mobility. The devices are immediately operatable after connectin between RF receiver and host computer is established via USB interface. The wireless keyboard also offers a set of buttons dedicated to often used internet browser and multimedia functions. Please follow the procedures below for device pairing, software installation, and device overviews.

3.1 Hardware Installation



1. Connect RF receiver to host computer via its available USB port.



2. Install the batteries into keyboard and mouse as illustrated. Please match up polarity signs on batteries and devices.
3. Press latches at the bottom of keyboard to release battery cover.
4. Press and slide the switch at the bottom of mouse and slide open the battery cover.



Notes:

- Both keyboard and mouse require 2 pieces of UM-3 (AA) Alkaline batteries.
- Depending on usage intensity, keyboard battery life is approximately 5 months and mouse battery life is approximately 3 months.

3.2 Pairing Device

The wireless devices are operatable immediately out of box after RF receiver is connected to host computer via USB port. In case the wireless connection between RF receiver and wireless devices is not properly established, please refer to the following section for pairing devcies.



1. Connect RF receiver to host computer via USB port. Press firmly on the **CONNECT** button on RF receiver. The button will blink slowly indicating it is now under pairing mode and ready to receive signals from keyboard and mouse.
2. Press **CONNECT** button once at the bottom of mouse to start pairing process. The button on RF receiver will flash rapidly 3 times if pairing process is completed.
3. Press **CONNECT** button once at the top right corner of keyboard to start pairing process. The button on RF receiver will flash rapidly 3 times if pairing process is completed.
4. Both devices now should be ready for use. Repeat above procedures if they are not properly connected.

Notes:

- The pairing process should not exceed 60 seconds. The RF receiver will automatically exit pairing mode if no signals is received within a short period of time.
- Please make sure that the host computer is powered on before pairing.
- Repeat pairing process if it is under interference of other wireless devices.

3.3 Hot Key Feature

Button Image	Button Name	Function
	Sleep	Press to instruct computer to enter sleep mode. Press any key to wake up the computer and return to the status before sleep mode.
	Previous Page	Press to return to previous web page when an Internet browser is present.
	Next Page	Press to skip to next web page when an Internet browser is present.
	Home Page	Press to bring up the default Internet browser.
	My Favorites	Press to bring up "My Favorites" panel when an Internet browser is present.
	Email	Press to bring up the default email program.
	Play/Pause	Press to pause when a file is being played by a media player. Press again to start playing.
	Stop	Press to stop file playback.
	Volume Down	Press to decrease the system volume.
	Volume Up	Press to increase the system volume.
	Previous Track	Press to return to the previous track when a file is being played by a media player.
	Next Track	Press to skip to the next track when a file is being played by a media player.
	Battery Status	The indicator turns red when keyboard battery is low.

4. Appendix

4.1 Product Specifications

CPU	Intel® Pentium® 4, Pentium® D, Core™ 2 Duo and Core™ 2 Quad compatible with FSB 1066/800 MHz on LGA775 form factor up to 95W
Chipset	North Bridge: Intel® G31 chipset South Bridge: Intel® ICH7 chipset
Memory	Unbuffered, Non-ECC, dual-channel DDRII 800/667 MHz 200-Pin DDRII SO-DIMM X 2 Maximum 4GB system memory
Video	Integrated Intel® Graphics Media Accelerator 3100
Audio	Compliant with Intel® High Definition Audio Flexible 6 channel audio output with jack sensing
Network Connectivity	Onboard Realtek® RTL8111B Ethernet controller supports 10/100/1000 dual Gigabit Ethernet port 802.11b/g Wireless LAN with WPA/WPA2 compliance Wireless IEEE 802.11b/g Extended Mini-PCI Express card
Hard Drive Disk	Serial ATA II @ 300MB/s data transfer rate Capacity up to 1 TB
Optical Drive	CD, DVD, CD-R, CD±RW, DVD±RW, DVD±RW DL supported
LCD Panel	19" TFT LCD panel Dimension: 310mm(L) X 190mm(W)
Power Adapter	DC 12V 180W power adapter
USB Connection	6 X USB 2.0 port
Rear I/O Connection	2 X Serial port, 1 X HDMI port, 1 X VGA port, 1 X DVI-D port, 2 X Gigabit LAN port, 4 X USB port, 1 X Audio port set
Speaker	2 X Internal speaker with 76dB+/-3dB @ 3W, 1M
Dimension	430mm(H) X 410mm(W) X 250mm(D)

4.2 Technical Support and Warranty Information

Please refer to www.prestigio.com for technical support and warranty information.

4.3 Disclaimer

We made every effort to ensure that the information and procedures in this user manual are accurate and complete. No liability can and will be accepted for any errors or omissions. **Prestigio** reserves the right to make any changes without further notice to any products herein.

4.4 Trademark Acknowledgement

Intel® is a registered trademark of Intel Corporation.

Realtek® is a registered trademark of Realtek Semiconductor Corporation.

Other names and products not mentioned above may be registered trademarks of their respective companies.